


## KASA500 EQ setting dip switch chart


Software Rev.: 10.04

### Internal Amplification EQ-AMP setting

KEF CI subwoofer model	Description	Internal amp signal type	EQ-AMP dip switches setting	Low pass frequency setting
Ci3160RLb-THX	THX performance for use with a surround processor	Mono	0000 0000	Front Knob Bypass
Ci3160RLb-THX	THX performance for use with a stereo preamp	Mono	0000 1000	Front Knob Control Enabled
Ci3160RLb-THX	Reduced low frequency output to minimize room vibration.	Mono	0000 0001	Front Knob Control Enabled
Ci3160RLb-THX	THX performance for use with a surround processor	Stereo	1000 0000	Front Knob Bypass
Ci3160RLb-THX	THX performance for use with a stereo preamp	Stereo	1000 1000	Front Knob Control Enabled
Ci3160RLb-THX	Reduced low frequency output to minimize room vibration.	Stereo	1000 0001	Front Knob Control Enabled
Ci200Qsb-THX	THX Performance with a surround processor	Mono	0000 0010	Front Knob Bypass
Ci200Qsb-THX	THX Performance with a stereo preamp	Mono	0000 0011	Front Knob Control Enabled
Ci200Qsb-THX	Reduced low frequency output to minimize room vibration	Mono	0000 1010	Front Knob Control Enabled
Ci200Qsb-THX	THX Performance with a surround processor	Stereo	1000 0100	Front Knob Bypass
Ci200Qsb-THX	THX Performance with a stereo preamp	Stereo	1000 0110	Front Knob Control Enabled
Ci200Qsb-THX	Reduced low frequency output to minimize room vibration	Stereo	1000 0101	Front Knob Control Enabled

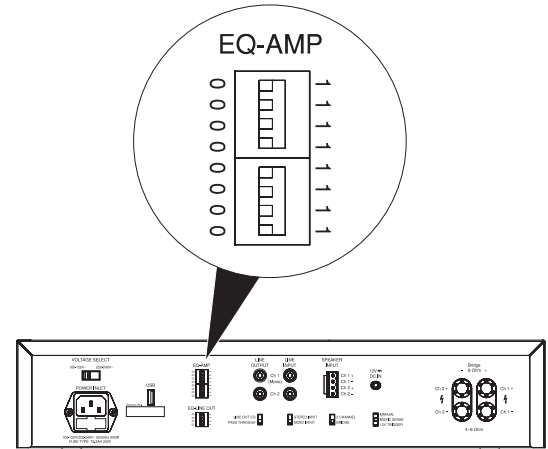

### THX Calibration

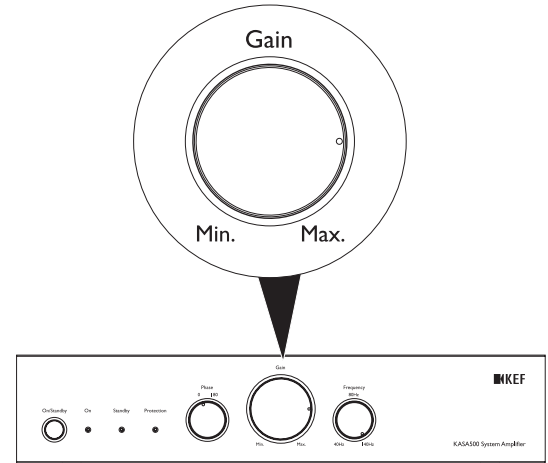

For THX:

- (1) Set initial gain to this position for THX calibration.
- (2) Then adjust subwoofer level in the surround processor calibration menu.
- (3) Adjust gain position as needed.

(continue on next page)

KEF CI subwoofer model	Description	Internal amp signal type	EQ-AMP dip switches setting	Low pass frequency setting
Ci200TRb	For use with a surround processor	Mono	0100 0001 0100	Front Knob Bypass
Ci200TRb	For use with a stereo preamp	Mono	0100 1100 0001	Front Knob Control Enabled
Ci200TRb	For use with a surround processor	Stereo	1100 0001 0100	Front Knob Bypass
Ci200TRb	For use with a stereo preamp	Stereo	1100 0001 1100	Front Knob Control Enabled
Ci4100QLb	For use with a surround processor or stereo preamp	Mono	0000 0000 0100	Front Knob Control Enabled
Ci4100QLb	For use with a surround processor or stereo preamp	Stereo	1000 0001 0100	Front Knob Control Enabled

### Internal Amplification EQ-LINE OUT setting

Setting Description	Line output signal type	EQ-LINE OUT dip switches setting
60Hz high pass	Stereo	1001
80Hz high pass	Stereo	1000
100Hz high pass	Stereo	1010
120Hz high pass	Stereo	1011
Straight pass through	Stereo	1111
Straight pass through	Mono	0111

